



TOPWOOD

Top Quality Top Value Top Service

TOPWOOD GUARANTEED


















2026 BROCHURE ^{V18}

TOPWOOD GARDEN BUILDINGS LTD



TABLE OF CONTENTS

TABLE OF CONTENTS

	<i>Shed Type / Section</i>	<i>Page</i>
	Workshops	2
	Pent & Apex Sheds	3 - 6
	Corner Shed	7
	Summer House Conversions	8 - 9
	Garden Leisure	10 - 12
	Potting Sheds	13 - 14
	Summer House / Chalet Range	15 - 19
	Childrens Playhouses	20 - 24
	Mini Sheds	25 - 27
	Roofing Options	28
	Sectional Buildings	29 - 30
	Single Glazed Windows & Doors	31
	Double Glazed Windows & Doors	32
	Insulation & Lining Options	33
	Optional Extras	34

WORKSHOPS



WOODCOCK = APEX ROOF / WOODPECKER = PENT ROOF



WOODPECKER & WOODCOCK



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 47x75 (45x70mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor and roof
- 4 3x2ft windows (3 fixed / 1 opening)
- 1 Pair of 4' wide double doors
- 24 kg felt, fittings, glass, padbolt
- Instructions for self assembly



10x8ft, Rustic Roof, 1 Extra Fixed Window
Pressure Treated & Solvent Treated

Apex Design: Height to eaves 6'9" int / Height to ridge 8' int

Pent Design: Low height: 6'9" int / high side 7'5" int



Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth

- | 8' x 8' |
- 9' x 8' |
- 9' x 8' |
- 10' x 8' |
- 11' x 8' |
- 12' x 8' |
- 13' x 8' |
- 14' x 8' |
- 15' x 8' |
- 16' x 8' |
- 16' x 8' |
- 17' x 8' |
- 18' x 8' |
- 19' x 8' |
- 20' x 8' |
- 9' x 9' |
- 10' x 9' |
- 12' x 9' |
- 14' x 9' |
- 10' x 10' |
- 12' x 10' |
- 14' x 10' |
- 16' x 10' |
- 18' x 10' |
- 20' x 10' |
- 22' x 10' |
- 24' x 10' |



Selection of Client Woodpecker & Woodcock Customisations



18x10ft, Woodcock, Security Doors With
Hook & Band Hinges, Rustic Roof



8x8ft, Woodcock, Rustic Roof
Pressure Treated & Solvent Treated



8x8ft, Woodcock, Rustic Roof
Pressure Treated & Solvent Treated



12x8ft, Woodpecker, 4' Double Security
Doors.
Pressure Treated & Solvent Treated



16x10ft, Woodpecker, Security Door,
Onduline Roof.
Pressure Treated & Solvent Treated



12x8ft, Woodpecker, 4' Double Security
Doors,
Pressure Treated & Solvent Treated

We can build to any size and design



Model: Robin



Standard 8x6ft, Pressure Treated & Solvent Treated



Standard Specification Includes:

FEATHEREDGE CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 25x150 (15>5mm) featheredge cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor and roof
- 24kg felt, fittings, glass, single door, padbolt
- Instructions for self-assembly
- Height to eaves 6' int (Approx.)
- Height to ridge 7'2" > 7'10" int (Approx.)

(Number of Windows will vary according to building size)



Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth:

| 4' x 4' | 5' x 4' | 6' x 4' | 7' x 5' | 8' x 6' | 10' x 6' | 10' x 8' | 12' x 8' |



Selection of Client Customisations of the Robin Model



10x10ft, Security Windows
Pressure Treated & Solvent Treated



10x6ft
Pressure Treated & Solvent Treated



6x8ft, Nuthatch Windows + Doors
Rustic Roof.
Pressure Treated & Solvent Treated



8x6ft
Pressure Treated & Solvent Treated



8x6ft, No Windows
Pressure Treated & Solvent Treated



6x8ft, 3ft Door
Pressure Treated & Solvent Treated

We can build to any size and design

PENT / APEX SHEDS



Model: Wren



Standard Specification Includes:

FEATHEREDGE CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 25 x150 (15>5mm) featheredge cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor and roof
- 24kg felt, fittings, glass, single door, padbolt
- Instructions for self-assembly
- Low Height 6'2" int (Approx.)
- High Height 7'2" int (Approx.)



(Number of windows will vary according to building size)

6x4ft, Pressure Treated & Solvent Treated

Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth:

| 4' x 4' | 5' x 4' | 6' x 4' | 7' x 5' | 8' x 6' | 10' x 6' | 10' x 8' | 12' x 8' |

Selection of Client Customisations of the Wren Model



7x5ft (D)



8x6ft, Low Front



6x4ft (D)



7x5ft (E)



With Optional Shelf



6x4ft (C)

Pent Range Styles



A



B



C



D



E



F

We can build to any size and design



Model: Jay



8x6ft Solvent Treated



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor and roof
- 24kg felt, fittings, glass, single door, lock & key
- Instructions for self-assembly
- Height to eaves 6'0" int (Approx.)
- Height to ridge 7'2" > 7'10" int (Approx.)

(Number of windows will vary according to building size)

➔ Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth:

| 6' x 4' | 7' x 5' | 8' x 6' | 10' x 6' | 10' x 8' | 10' x 10' | 12' x 6' | 12' x 8' | 12' x 10' | 14' x 8' |



Selection of Client Customisations of the Jay Model



7x7ft, 5' Double Doors, Rustic Roof, Pressure Treated & Solvent Treated



8x6ft Stable Door, 3 Opening Windows Pressure Treated & Solvent Treated



10x6ft, Pressure Treated



8x8ft, Stable Door, 2 Opening Windows Pressure Treated & Solvent Treated



6x8ft, 2ft Roof Overhang, Rustic Roof Pressure Treated & Solvent Treated



8x10ft, Housemartin Windows, 2ft Roof Overhang, Solvent Rustic Roof Pressure Treated Building

We can build to any size and design



Model: Owl



6x4ft Owl, Bearers, Pressure Treated & Solvent Treated



Standard Specification Includes:

- QUALITY T&G SHIPLAP CLADDING**
- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor and roof
- 24kg felt, fittings, glass, single door, lock & key
- Instructions for self-assembly
- Height to eaves 6'0" int (Approx.)
- Height to ridge 7'2" > 7'10" int (Approx.)

Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth

| 6' x 4' | 7' x 5' | 8' x 6' | 10' x 6' | 10' x 8' | 10' x 10' | 12' x 6' | 12' x 8' | 12' x 10' | 14' x 8' |



Selection of Client Customisations of the Owl Model



12x5ft (D) 5' Double Doors
Pressure Treated & Solvent Treated



12x8ft (D)
Pressure Treated & Solvent Treated



12x10ft (C)
Solvent Treated



12x6ft (D)
Pressure Treated & Solvent Treated



12x6ft (C) Double Doors
Pressure Treated & Solvent Treated



10x8ft (C) Security Door, Onduline Roof
Pressure Treated, 2 - 3x2ft Opening Windows

Pent Range Styles



We can build to any size and design

SUMMER HOUSE CONVERSIONS



Model: Sparrow



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 18" Roof overhang as standard
- 24kg felt, fittings, glass, single door, lock & key
- 4 fixed windows, instructions for self-assembly
- Height to eaves 6'1" int (Approx.)
- Height to ridge 7'6" > 7'10 int (Approx.)



6x8ft, Pressure Treated & Solvent Treated

➔ Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth:

| 4' x 8' | 6' x 8' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' | 6' x 10' | 8' x 10' | 10' x 10' | 12' x 10' |



6x8ft, Pressure Treated



5x8ft, Pressure Treated



5x7ft, Solvent Treated



6x10ft, Rustic Roof, Pressure Treated



6x8ft, Solvent Rustic Roof, Pressure Treated Building

We can build to any size and design



Model: Osprey I



6x8ft (I) Pressure Treated & Solvent Treated



Model: Osprey II



6x8ft (II) Pressure Treated & Solvent Treated
(Optional 2ft Verandah)

Popular Sizes: Width X Depth:

| 4' x 8' | 6' x 8' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' | 16' x 8' | 6' x 10' | 8' x 10' | 10' x 10' | 12' x 10' | 14' x 10' | 16' x 10' |

Customisations of the Osprey I & II Models



8x8ft (I) 3ft Verandah , Rustic Roof,
Opening Windows.
Pressure Treated & Solvent Treated



8x10ft (II) Double Doors, Loglap Cladding,
3 Opening Windows, Rustic Roof,
Pressure Treated & Solvent Treated



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 22" Roof overhang as standard
- 3 fixed leaded windows
- 24kg felt, flower boxes
- Fittings, glass, single door, lock & key
- Instructions for self assembly
- Height to eaves 6'4" int (Approx.)
- Height to ridge 7'10" int (Approx.)
- Osprey I : Stable Door
- Osprey II : Leaded Glazed Door



Optional Extras Available - See Page 34 For Full List

We can build to any size and design

Model: Skylark



10x6ft, Pressure Treated & Solvent Treated



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor and roof
- 24kg felt, fittings, toughened glass, single door, lock & key
- 4 fixed windows, 36" Roof overhang as standard
- Instructions for self-assembly
- Height to eaves 6'6" int (Approx.)
- Height to ridge 7'1" int (Approx.)

→ Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth:

| 6' x 6' | 8' x 6' | 10' x 6' | 12' x 6' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' | 10' x 10' | 12' x 10' | 14' x 10' |

Model: Animal Enclosure



8x6ft, Pressure Treated & Solvent Treated



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 24kg felt, fittings, padbolt
- Floor or no floor option to run area
- Internal partition with door
- Mesh door to run area
- 1 fixed window, 2 vents for air circulation
- Instructions for self assembly
- Height to eaves - 6'2" int (Approx.)
- Height to ridge - 7'2" int (Approx.)

→ Optional Extras Available - See Page 34 For Full List

Perfect for all kinds of animals, Dogs, Cats, Birds, Rabbits, Guinea pigs, Chickens Ducks and more. Please consider the required size of living and run area when ordering for your chosen pet. The run area can be with or without a timber floor.

We can build to any size and design

Model: Open Bar



8x6 Featheredge, Pressure Treated & Solvent Treated



Standard Specification Includes:

FEATHEREDGE CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 25 x150 (15>5mm) featheredge cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor and roof
- 24kg felt, fittings
- 12" Roof overhang as standard
- Instructions for self-assembly
- Low Height 6'3" int (Approx.)
- High Height 7'1" int (Approx.)

→ Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth:

| 6' x 6' | 8' x 6' | 10' x 6' | 12' x 6' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' | 10' x 10' | 12' x 10' | 14' x 10' |

Model: Garden Bar



10x6ft, Left Hand Stable Security Door Upgrade
Pressure Treated & Solvent Treated



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125mm (12x119mm) T&G shiplap cladding
- 38x50mm (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125mm (12x119mm) T&G floor & roof
- 24kg felt, fittings, lock & key
- Standard shed door, side hung hatch
- Front hung hatch with supports
- 15" workbench to one side
- Instructions for self assembly
- Height to eaves - 6'2" int (Approx.)
- Height to ridge - 7'2" int (Approx.)

→ Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth:

| 8 x 6' | 10' x 6' | 12' x 6' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' | 10' x 10' | 12' x 10' | 14' x 10' |

We can build to any size and design

Model: Gazebo




8x8ft, Rustic Roof, Pressure Treated & Solvent Treated



Standard Specification Includes:

- QUALITY T&G SHIPLAP CLADDING**
- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 47x75 (45x70mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 24kg felt, fittings
- Instructions for self-assembly
- Can have balustrade, half boarded or fully boarded sections,
- In any combination, at no additional cost.
- Height to eaves - 6'9" int (Approx.)
- Height to ridge - 7'10" int (Approx.)

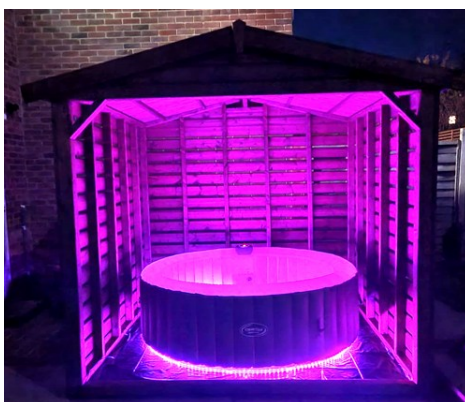

Gazebos and Logstores can be added to the side or back of most buildings.

Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth:

| 8 x 6' | 10' x 6' | 12' x 6' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' | 10' x 10' | 12' x 10' | 14' x 10' |

We can build to any size and design

POTTING SHED



Model: Potting Shed



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 2 opening windows, single door
- Bench included
- Glass Included
- 24kg felt, fittings, lock & key
- Instructions for self-assembly
- Height high side - 7'2" int (Approx.)
- Height low side - 6'4" int (Approx.)

18x10ft, Double Doors, Pressure Treated & Solvent Treated



8x8 Onduline Roof
Pressure Treated & Solvent Treated



16x10, Partition, Double Doors
Pressure Treated & Solvent Treated



10x6, Partition, Extra Door
Pressure Treated



10x8, Stable Security Door
Pressure Treated & Solvent Treated



10x8, Stable Security Door
Pressure Treated & Solvent Treated



8x8 Onduline Roof
Pressure Treated & Solvent Treated

Popular Sizes: Width X Depth:

| 6' x 6' | 8' x 6' | 10' x 6' | 12' x 6' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' | 10' x 10' | 12' x 10' | 14' x 10' |



Optional Extras Available - See Page 34 For Full List

We can build to any size and design

POTTING SHED



Model: Snipe



10x8ft, Left Hand Door, Pressure Treated



10x6ft, Left Hand Door, Pressure Treated



8x6ft, Right Hand Standard Door
Solvent Treated



8x5ft, Left Hand Door, Pressure Treated



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 1 opening window, Toughened glass
- Stable door & potting bench
- 24kg felt, fittings, lock & key
- Instructions for self-assembly
- Height high side 6'11" int (Approx.)
- Height low side 6'4" int (Approx.)



Optional Extras Available - See Page 34 For Full

Popular Sizes: Width X Depth:

| 8 x 6' | 10' x 6' | 12' x 6' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' | 10' x 10' | 12' x 10' | 14' x 10' |

We can build to any size and design



Model: Raven



8x6 Raven, Pressure Treated & Solvent Treated, Rustic Roof

Popular Sizes: Width X Depth

| 6' x 8' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' |



QUALITY LOGLAP CLADDING

100% timber construction (Untreated)
 Scandinavian redwood pine throughout
 25x125 (20x119) Rebated Loglap Cladding
 38x50 (34x45mm) prepared framework
 Diagonal bracing for extra building strength
 16x125 (12x119mm) T&G floor & roof
 22" Roof overhang as standard
 Wavy fascia boards included
 1 opening & 2 fixed windows
 Diamond leaded glass
 24kg felt, flower boxes
 Fittings, glass, single glazed door, lock & key
 Instructions for self-assembly
 Height to eaves 6'4" int (Approx.)
 Height to ridge 7'10" int (Approx.)



Optional Extras Available - See Page 34 For Full List



Model: Swift



8X8ft Pressure Treated Building, Solvent Rustic Roof

Popular Sizes: Width X Depth

| 6' x 8' | 8' x 8' | 10' x 8' | 12' x 8' | 14' x 8' |



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

100% timber construction (Untreated)
 Scandinavian redwood pine throughout
 16x125 (12x119mm) T&G shiplap cladding
 38x50 (34x45mm) prepared framework
 Diagonal bracing for extra building strength
 16x125 (12x119mm) T&G floor & roof
 22" Roof overhang as standard
 Wavy fascia boards included
 4 opening side windows with vents &
 2 front fixed windows
 24kg felt, fittings, glass, lock & key
 Double doors with antique door furniture
 Instructions for self-assembly
 Height to eaves 6'4" int (Approx.)
 Height to ridge 7'10" int (Approx.)



Optional Extras Available - See Page 34 For Full List

We can build to any size and design



Model: Nightingale / Eagle



8x10ft EAGLE, Pressure Treated & Solvent Treated
* Wings Are Optional

Popular Sizes: Width X Depth

| 6' x 8' | 8' x 8' | 6' x 10' | 8' x 10' | 10' x 10' |



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 22" Roof overhang as standard
- Wavy fascia boards included
- 4 opening side windows with vents & 2 front fixed windows
- 24kg felt, fittings, glass, lock & key
- Double doors with antique door furniture
- Instructions for self-assembly
- Height to eaves 6'4" int (Approx.)
- Height to ridge 7'10" int (Approx.)

Optional Extras Available - See Page 34 For Full List



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 22" Roof overhang as standard
- 24kg felt, fittings, glass
- Including 4 opening windows
- Double doors with antique furniture
- Lock and key
- Instructions for self-assembly
- Height to eaves 6'4" int (Approx.)

Optional Extras Available - See Page 34 For Full List



Model: Kestrel



6x10ft, Bearers, Pressure Treated & Solvent Treated

Popular Sizes: Width X Depth

| 6' x 8' | 8' x 8' | 6' x 10' | 8' x 10' | 10' x 10' |

We can build to any size and design



Model: Mallard



6x12ft, Pressure Treated & Solvent Treated, Rubber Roof, Toughened

Popular Sizes: Width X Depth

| 6' x 12' | 8' x 12' | 10' x 12' | 12' x 12' |



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 24" Roof overhang as standard
- Wavey fascia boards included
- 24kg felt, fittings, glass, lock & key
- Including 2 opening windows & 1 bay window
- Double doors with antique furniture
- Instructions for self-assembly
- Height to eaves 6'4" int (Approx.)
- Height to ridge 8'2" int (Approx.)



Optional Extras Available - See Page 34 For Full List



Model: Nuthatch



8x10ft, Additional side door, Pressure Treated Building, Solvent Rustic Roof

Popular Sizes: Width X Depth

| 6' x 10' | 8' x 10' | 10' x 10' | 12' x 10' | 6' x 12' | 8' x 12' | 6' x 12' | 8' x 12' | 6' x 14' | 8' x 14' | 10' x 14' | 12' x 14' |



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 22" Roof overhang as standard
- Wavey fascia boards included
- 24kg felt, fittings, glass, lock & key
- 2 fixed windows
- 2 opening windows with vents
- Double doors with antique furniture
- Instructions for self-assembly
- Height to eaves 6'4" int (Approx.)
- Height to ridge 8'2" int (Approx.)



Optional Extras Available - See Page 34 For Full List

We can build to any size and design



Model: Housemartin



12x14ft, Rustic Roof
Pressure Treated & Solvent Treated

Popular Sizes: Width X Depth

| 12' x 10' | 14' x 10' | 12' x 12' | 14' x 12' | 16' x 12' | 12' x 14' |



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 24kg felt, fittings, glass, lock & key
- 2 fixed & 2 opening windows
- Double doors with antique furniture
- Depth includes 4ft verandah
- Instructions for self-assembly
- Height to eaves 6'4" int (Approx.)
- Height to ridge 8'2" int (Approx.)



Optional Extras Available - See Page 34 For Full List



Model: Falcon



12x10ft, Double Glazed Glass
Pressure Treated & Solvent Treated



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 47x75 (45x70mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 21" Roof overhang as standard
- 24kg felt, fittings, lock & key.
- Double glazed toughened glass
- Glass to ground double doors & windows.
- 2 vented windows, 2 fixed windows
- Rear privacy window as standard
- Instructions for self assembly
- Low Height 6'7" int (Approx.)



Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth

| 12' x 6' | 14' x 6' | 16' x 6' | 12' x 8' | 14' x 8' | 16' x 8' | 12' x 10' | 14' x 10' | 16' x 10' | 12' x 12' | 14' x 12' | 16' x 12' |

We can build to any size and design



Model: Hummingbird



16x12ft, Rustic Roof, Solvent Treated



Standard Specification Includes:

LOG LAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 25x125 (20x119) Rebated Loglap Cladding
- 47x75 (45x70mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- 24" Roof overhang as standard
- 24kg felt, fittings, glass, lock & key
- Double doors with antique furniture
- 2 fixed & 2 opening windows
- Instructions for self-assembly
- Height to eaves 8'10" int (Approx.)
- Height to ridge 9'10" int (Approx.)



Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth

| 8' x 16' | 10' x 16' | 12' x 16' | 14 x 16' | 16' x 16' | 8' x 12' | 10' x 12' | 12' x 12' | 14' x 12' | 16' x 12' |

Optional Verandah's



3ft Verandah With Front Handrail



Optional seating also available.



Verandah's can be added to all building's of all sizes and made to any width and depth.



4ft Verandah With Support Post. Fully Open

We can build to any size and design

Model: Jack & Jill



8x8ft, Pressure Treated & Solvent Treated



6x8ft, Rustic Roof, Pressure Treated & Solvent Treated



Popular Sizes: Width X Depth

| 7' x 5' | 7' x 6' | 8' x 6' | 7' x 7' | 8' x 8' | 10' x 8' |

Model: Manor House



Upper Floor



10x8'6"
Pressure Treated & Solvent Treated



10x12'6", 2 Additional Windows, Window Boxes, Rustic Roof, Pressure Treated & Solvent Treated



Sizes: Width X Depth

| 10x8'6" | 10x10'6" | 10x12'6" | 10x14'6" |



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- 16" Roof overhang as standard
- Wavy fascia boards included
- Upper floor with safety rail and ladder
- 24kg felt & fittings, perspex, stable door
- 4 fixed windows, flower boxes
- Instructions for self assembly
- Height to low eaves ridge 6' int (Approx.)
- Height to high eaves 6'4" int (Approx.)
- Height to ridge 7'5" int (Approx.)



Optional Extras Available - See Page 34 For Full



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- Wavy fascia boards included
- Upper floor with safety rail and ladder
- 24kg felt, fittings, flower boxes
- Joinery door & 5 fixed windows, safety perspex
- Instructions for self assembly
- Height to eaves 6' int (Approx.)
- Height to ridge 7' int (Approx.)

* Also available in log-lap cladding *



Optional Extras Available - See Page 34 For Full List

IMPORTANT: Playhouses with upper floors are not recommended for unsupervised play for children under 36 months of age.

We can build to any size and design

Model: Alpine



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- Wavy fascia boards included
- Upper floor with safety rail & ladder
- 24kg felt, fittings, safety perspex
- 2 joinery doors & 4 fixed windows
- Internal ladder to upper floor and balcony
- Solvent & installation included
- Instructions for self assembly
- Height to eaves 7'2" int (Approx.)
- Height to apex 10'7" int (Approx.)

Optional Extras Available - See Page 34 For Full List



8x10ft (One Size Only) Side Shed Not Included

Size: Width X Depth:

| 8' x 10' |

Model: Bart & Lisa



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- Wavy fascia boards included
- Upper floor with safety rail and ladder
- 24kg felt, fittings, safety perspex
- Joinery door & 4 fixed windows
- Instructions for self assembly
- Height to eaves low side 4' int (Approx.)
- Height to eaves high side 5' int (Approx.)
- Ridge height 8' int (Approx.)

Optional Extras Available - See Page 34 For Full List



6x8ft + 2ft Verandah, Blue Fascia Pack
Pressure Treated & Solvent Treated

Popular Sizes: Width X Depth

| 8' x 6' | 8' x 8' | 10' x 8' |

IMPORTANT: Playhouses with upper floors are not recommended for unsupervised play for children under 36 months of age.

We can build to any size and design

Model: Bikers Rest



6x9ft, Pressure Treated & Solvent Treated

Popular Sizes: Width X Depth

| 9' x 6' | 12' x 6' |



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- Wavy fascia boards included
- 24kg felt, fittings, safety perspex
- 2 joinery doors & 3 fixed windows
- Partition included
- Instructions for self assembly
- Height to eaves 4'7" int (Approx.)
- Height to ridge 6'2" int (Approx.)



Optional Extras Available - See Page 34 For Full List

Model: Den



5x5ft, Pressure Treated & Solvent Treated, Rubber Roof

Popular Sizes: Width X Depth

| 5' x 5' | 6' x 6' | 7' x 7' |



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- 24kg felt, fittings, safety perspex
- 3 fixed windows
- Flower boxes, stable door
- Instructions for self assembly
- Height to eaves 5' int (Approx.)
- Height to ridge 6'1" int (Approx.)



Optional Extras Available - See Page 34 For Full List

IMPORTANT: Playhouses with upper floors are not recommended for unsupervised play for children under 36 months of age.

We can build to any size and design

Model: Play House



8x8ft with Seating, Pressure Treated & Solvent Treated



* Images Shown With Shiplap Cladding

Popular Sizes: Width X Depth

| 7' x 7' | 8' x 8' |

Model: Ranch House



8x8ft, Rustic Roof, Pressure Treated & Solvent Treated



Size: Width X Depth

| 8' x 8' |



Standard Specification Includes:

QUALITY LOGLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 25x125 (20x119mm) Loglap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- Wavy fascia boards included
- 24kg felt, fittings, safety perspex
- 4 fixed windows
- Flower boxes, joinery door
- Instructions for self assembly
- Height to eaves 4'11" int (Approx.)
- Height to apex 6'2" int (Approx.)
- * Front Benches or Flower Boxes



Optional Extras Available - See Page 34 For Full List



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- 24kg felt, fittings, safety perspex
- Joinery door & 3 fixed windows
- Fixed shutters
- Instructions for self assembly
- Height to eaves 4'10" int (Approx.)
- Height to apex 6'3" int (Approx.)



Optional Extras Available - See Page 34 For Full List

IMPORTANT: Playhouses with upper floors are not recommended for unsupervised play for children under 36 months of age.

We can build to any size and design

Model: Shopkeepers Cabin



8x6ft, Solvent Treated (Sign Not Included)



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- Wavy fascia boards included
- 24kg felt, fittings, safety perspex
- Joinery door & 2 fixed windows
- Optional partition
- Instructions for self assembly
- Height to eaves 5'3" int (Approx.)
- Height to apex 6'6" int (Approx.)



Optional Extras Available - See Page 34 For Full

Popular Sizes: Width X Depth

| 7' x 4' | 7' x 5' | 7' x 6' | 7' x 7' | 7' x 8' | 7' x 9' | 7' x 10' | 8' x 4' | 8' x 5' | 8' x 6' | 8' x 7' | 8' x 8' | 8' x 9' | 8' x 10' |

Model: Wendy House



6x4ft, Solvent Treated



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- 16x125 (12x119mm) T&G floor & roof
- 24kg felt, fittings, safety perspex
- Flower boxes, stable door
- 3 fixed windows
- Instructions for self assembly
- Height to eaves 5' int (Approx.)
- Height to apex 6'1" int (Approx.)



Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth

| 5' x 3' | 5' x 4' | 6' x 4' | 7' x 5' | 8' x 5' | 8' x 6' |

IMPORTANT: Playhouses with upper floors are not recommended for unsupervised play for children under 36 months of age.

We can build to any size and design

Featheredge Mini Shed



4x8ft, Apex Roof, Rustic Roof, Pressure Treated & Solvent Treated



Standard Specification Includes:

FEATHEREDGE CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 25x150 (15>5mm) Featheredge cladding
- 38x50 (34X45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (2x119mm) T&G floor & roof
- 24kg felt, fittings, padbolt
- Double doors (max 3ft less than width of building)
- Instructions for self assembly
- APEX DESIGN:** Height to Eaves 4'11" - Height to Apex 5'11" int
- PENT DESIGN:** Height High Side 5'2" - Height Low Side 4'11" int
- * Can be Apex or Pent roof *

Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth
 | 3' x 2' | 4' x 2' | 5' x 2' | 6' x 2' | 7' x 2' | 3' x 3' | 4' x 3' | 5' x 3' | 6' x 3' | 7' x 3' | 4' x 4' | 5' x 4' | 6' x 4' | 7' x 4' | 8' x 4' |

Shiplap Mini Shed



6x3ft, Pent Roof, Solvent Treated



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 38x50 (34x45mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor & roof
- Double doors (max 3ft less than width of building)
- 24kg felt, fittings & padbolt
- Instructions for self assembly
- APEX DESIGN:** Height to Eaves 4'11" - Height to Apex 5'11" int
- PENT DESIGN:** Height High Side 5'2" - Height Low Side 4'11" int
- * Can be Apex or Pent roof *

Optional Extras Available - See Page 34 For Full List

Popular Sizes: Width X Depth
 | 3' x 2' | 4' x 2' | 5' x 2' | 6' x 2' | 7' x 2' | 3' x 3' | 4' x 3' | 5' x 3' | 6' x 3' | 7' x 3' | 4' x 4' | 5' x 4' | 6' x 4' | 7' x 4' | 8' x 4' |

We can build to any size and design

Model: Tall Store



* With Optional Rustic Roof



* With Optional Security Door & Rustic Roof



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

100% timber construction (untreated)
 Scandinavian Redwood Pine Throughout
 16x125 (12x119mm) T&G Shiplap Cladding
 38x50 (34x45mm) prepared framework
 Diagonal bracing for extra building strength
 16x125 (12x119mm) T&G floor and roof
 24kg felt, fittings, lock & key
 Instructions for self-assembly

APEX DESIGN: Height to Eaves 6' - Height to Apex 6'8" int
PENT DESIGN: Height High Side 6'8" - Height Low Side 6'4"

Popular Sizes: Width X Depth

| 3'6" x 2' | 4'6" x 2' | 3'6" x 2'6" | 4'6" x 2'6" |

Model: Log Store



* Shows With Optional Rustic Roof



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

100% timber construction (untreated)
 Scandinavian Redwood Pine Throughout
 16x125 (12x119mm) T&G Shiplap Cladding
 38x50 (34x45mm) prepared framework
 Diagonal bracing for extra building strength
 16x125 (12x119mm) T&G floor and roof
 24kg felt, fittings. Instructions for self-assembly
 Low Height: 3'10" int.
 High Height : 4'2" int (Approx.)

Can be Apex or Pent.

Can be built to any size to fit your space.

Popular Sizes: Width X Depth

| 3' x 2' | 4' x 2' | 5' x 2' | 6' x 2' | 7' x 2' | 3' x 3' | 4' x 3' | 5' x 3' |
 | 6' x 3' | 7' x 3' | 4' x 4' | 5' x 4' | 6' x 4' | 7' x 4' | 8' x 4' |

We can build to any size and design

MODEL: DUAL TALLSTORE / LOGSTORE



6x3ft, Pressure Treated & Solvent Treated, Bearers

Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

100% timber construction (Untreated)
 Scandinavian redwood pine throughout
 16x125 (12x119mm) T&G shiplap cladding
 38x50 (34x45mm) prepared framework
 Diagonal bracing for extra building strength
 16x125 (12x119mm) T&G floor & roof
 Single door, Partition, 24kg felt, fittings, Lock & Key
 Instructions for self assembly

APEX DESIGN: Height to Eaves 4'11" - Height to Apex 5'11" int
PENT DESIGN: Height High Side 5'2" - Height Low Side 4'11" int

* Can be Apex or Pent Roof *

MODEL: THAT'S HANDY



Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

100% timber construction (untreated)
 Scandinavian Redwood Pine Throughout
 16x125 (12x119mm) T&G Shiplap Cladding
 38x50 (34x45mm) prepared framework
 16x125 (12x119mm) T&G floor and roof
 24kg felt, fittings. Instructions for self-assembly
 Low Height 2'5" int - Hi Height 2'10" int (approx.)
 * Perfect for parcels & garden toys *

Building Size

| 2'7" x 1'9" | 5'2" x 1'9" |

MODEL: GARDEN TIDY



4'6x2'6, Pressure Treated & Solvent Treated, Bearers

Standard Specification Includes:

QUALITY T&G SHIPLAP CLADDING

100% timber construction (untreated)
 Scandinavian Redwood Pine Throughout
 16x125 (12x119mm) T&G Shiplap Cladding
 38x50 (34x45mm) prepared framework
 Diagonal bracing for extra building strength
 16x125 (12x119mm) T&G floor and roof
 24kg felt, fittings. Instructions for self-assembly
 Padbolt. Door variations to customer requirements.
 Low Height high: 3'3" int.
 High Height : 3'6" int (Approx.)

Building Size

4'6" x 2'6"

We can build to any size and design



ONDULINE ROOFING

Onduline Classic: An extremely tough, lightweight, corrugated roofing system, made from recycled cellulose fibres and is suitable for a range of applications.

The lightweight roofing sheets are suitable for both renovation and new construction, and can be used on either wooden or metal structures.

The sheets are finished with a colour pigment and resin impregnation process which "stains" the colour into the sheet to provide excellent colour retention properties and enhanced U.V. resistance.

Onduline Classic roof solution is the perfect roof product for water tightness as well as providing thermal and acoustic comfort.



RUSTIC ROOF

Our **Rustic Roof** option offers not only an attractive look but a complete protection from overhanging tree branches and falling debris, lowering maintenance required and extending the life of your building.

The Rustic Roof is constructed from Pressure Treated Featheredge boards and 38x50 framing.

Solvent based treatment is included with every rustic roof.

The **Rustic panels** are fitted over the top of your buildings felt roof.



RUBBER ROOFING

Upgrade your roof today with Shed Rubber 1.14mm EPDM Membrane.

Increase your shed roofs longevity, durability and protection.

Our Shed Rubber EPDM Membranes are designed especially for your shed roofs. Because these membranes are only 1.14mm in thickness, our rubber EPDM membranes are incredibly lightweight and won't be a strain on your sheds' structure.

Rubber EPDM membranes have been trialled and tested to be **effective for 50 years** or more.

We can build to any size and design

SECTIONAL BUILDINGS



We offer a large range of wooden sectional garden workshop sheds, workshop buildings, garden offices and timber cabins. Our sectional buildings are ideal for those looking to add the extra space that smaller garden sheds simply don't offer.



SECTIONAL SHEDS & WORKSHOPS

We manufacture sectional garden sheds in many shapes and sizes, all of which can be further customised to perfectly meet your needs.

You can choose from a wide range of optional extras such as bespoke doors, additional windows, alternative lining and insulation, extra partitions, extra height, thicker cladding, thicker floorboards, guttering, rubber roof and onduline roofing.

We build all of our sectional workshops to a high standard for long-lasting wear and tear which remain solid in adverse weather conditions.



Size: 20' x 18'

 Fully Customisable

We offer a large range of quality sectional sheds and garden workshops to suit all tastes and budgets.



Size: 8' x 16'



Size: 14' x 12'




Size: 33 x 17'



Size: 20 x 20'



Size: 18' x 8'

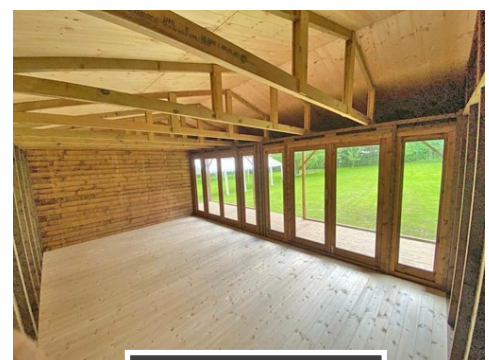

Size: 20' x 18'

We can build to any size and design

SECTIONAL BUILDINGS



Size: 18' x 18'



Size: 25' x 10'




Size: 12' x 15'



Size: 40' x 17'



Size: 60' x 20'

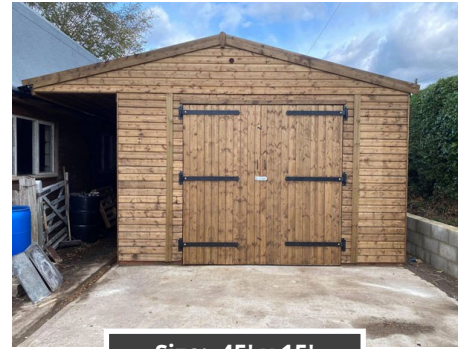

Size: 45' x 15'



STANDARD SPECIFICATIONS

- 100% timber construction (Untreated)
- Scandinavian redwood pine throughout
- 16x125 (12x119mm) T&G shiplap cladding
- 47x75 (45x70mm) prepared framework
- Diagonal bracing for extra building strength
- 16x125 (12x119mm) T&G floor and roof
- 1 pair of standard double doors
- 6'2" high X any width up to 8'0" wide
- (except 18' and 20' wide buildings which include 2 sets of double doors)
- 1 single personal door 6'2"x3'0" wide with lock
- 1 opening and 2 fixed 2'x2' glazed windows
- Eaves height 6'7" internal
- Ridge height external (varies with width of building)



OPTIONAL EXTRAS

- Additional doors
- Additional windows
- Lining and insulation
- Partitions (up to eaves height)
- Extra height
- Thicker cladding & thicker floor boards
- Fixing down
- Guttering
- Upgrade framing
- Upgrade to onduline bituminous roofing sheet
- Upgrade to EPDM rubber roofing
- Plus even more extras (**see page 34**)










Popular Sectional Shed Sizes: Width X Depth

| 12' x 8' to 20' x 8' | 10' x 10' to 20' x 10' | 12' x 12' to 20' x 12' | 16' x 14' to 20' x 14' | 16' x 18' to 20' x 18' | 16' x 20' to 20' x 20' |

We can build to any size and design

SINGLE GLAZED WINDOWS & DOORS TO SUIT

With 3mm horticultural glass or upgrade to 4mm toughened glass.
Brown plastic fittings and metal hinges as standard.

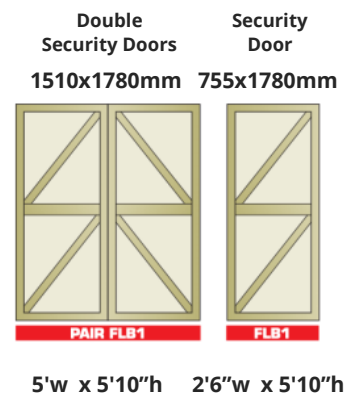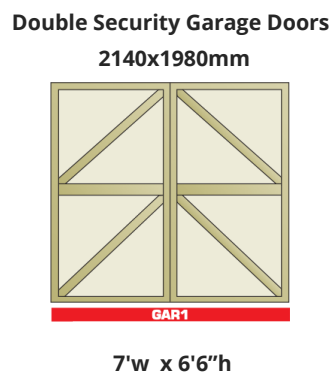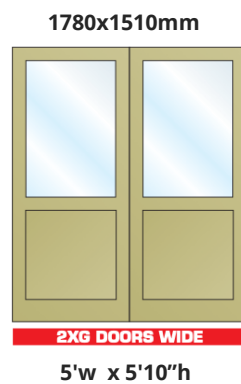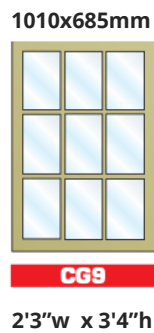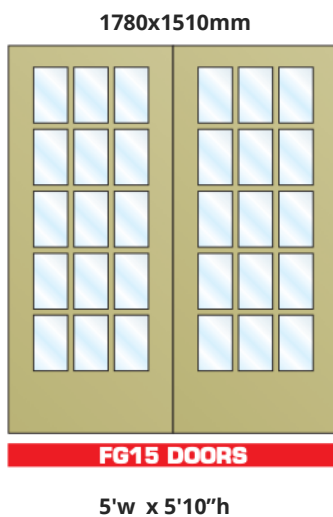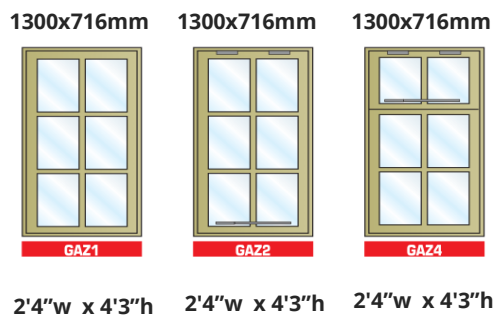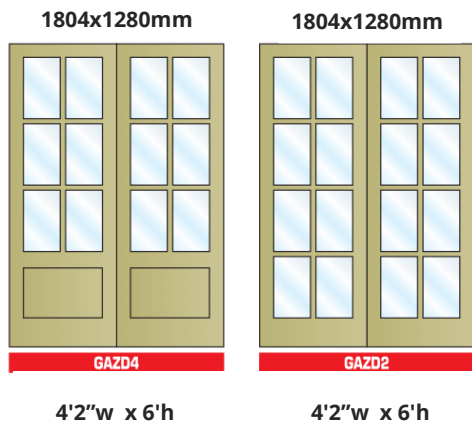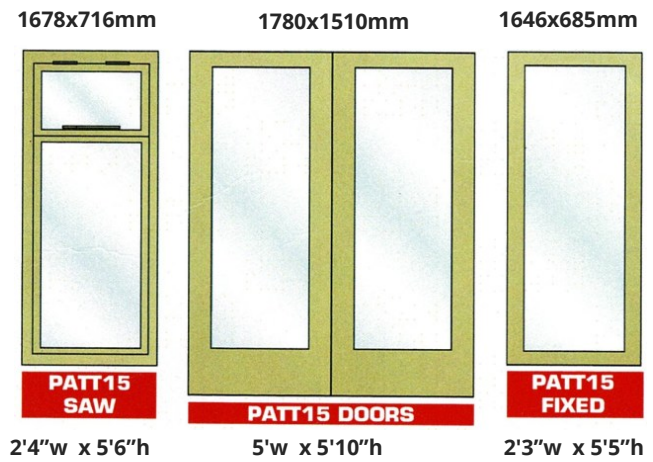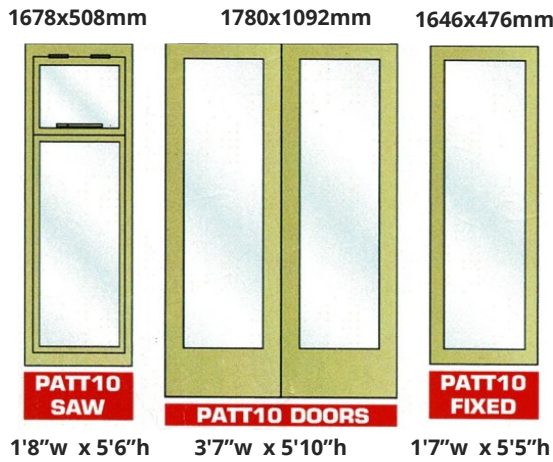

* ALL SIZES ARE APPROXIMATE *

WORKSHOPS / STORAGE & SECTIONAL BUILDINGS



Our range of double glazed windows and doors can be installed in sheds that are a minimum 47x75 framework such as the Woodcock, Woodpecker models and sectional buildings.

DOUBLE GLAZED WINDOWS AND DOORS TO SUIT



With 4mm toughened glass either side of a 6mm double glazed unit. Chrome fittings as standard, locks to all openings and 3 lever door lock.



DOUBLE GLAZED DOORS AND WINDOWS TO SUIT



With 4mm toughened glass either side of a 6mm double glazed unit. Chrome fittings as standard, locks to all openings and 3 lever door lock.

ALL SIZES ARE APPROXIMATE

Topwood can insulate and line your building after 1st phase electrics are fitted to hide away the cables, this service must be requested at point of sale.



BREATHER MEMBRANE - MOISTURE BARRIER

3-layer, High performance, yet lightweight, breather membrane designed for use in all insulated wall, floor and ceiling applications.

This membrane has an excellent Class W1 water resistance but still provides high breathability.



EARTHWOOL INSULATION

100mm thickness with a thermal conductivity of 0.044 W/mK. Earthwool is odourless, rot proof, non-hygroscopic, does not sustain vermin and will not encourage the growth of fungi, mould or bacteria.

(50mm used in shed framing buildings, all floors insulated with 25mm Quinn Therm as standard).



CELOTEX INSULATION

50mm Quinn Therm has top-performing thermal conductive properties for use in floors, roofs and walls.

The low thermal conductivity of Quinn Therm boards maximise the performance of their insulation properties and enables low U-values to be achieved.

All Quinn Therm PIR Insulation boards have zero Ozone Depletion Potential (ODP) and a A+ green guide rating, making them not just thermally efficient but will improve the overall sustainability of the building.

Quinn Therm PIR Insulation has a thermal conductivity of 0.022W/mK, making it one of the most effective rigid insulation boards available.

We can build to any size and design

AVAILABLE OPTIONAL EXTRAS



Pent Sheds/ Apex Sheds / Workshops / Summer House-Chalet / Playhouses / Potting & Mini Sheds

The following shows the current available optional extras.
Other optional extras, other sizes and variations may be available on request.



Available in Various Sizes
Installation
Bearers
Heavy Duty Cladding
Pressure Treated Upgrade
Solvent Treatment (light brown)
Rustic Roof
Onduline Roof
Rubber Roof
Overhang to Roof
25mm Loglap Cladding
4x2 Framing Upgrade
Hook & Band Hinges (only on security doors)
Coach Bolt Hinges
Extra Height
Double Glazed Windows & Doors
No Floor
Partition

Guttering & Downpipe (not available with rustic roofs)
Toughened Glass
Shelves & Workbenches
Wider Door / Extra Door
Security Door / Double Doors
Joinery Summer house Doors
Security Windows
Extra Windows
Opening Windows
Leaded Windows
Joinery Summer house Windows
Window Boxes
Sealed Units (double glazed)
Lining Paper (moisture barrier)
Insulation & Plywood Lining
Insulation & Tongue & Groove
Matchboard Lining
PVC Membrane (secondary moisture barrier)
Thicker Floor Boards



Treatment and Installation Service Available

- * All shed sizes shown in the images are approximate.
- * Prices and specifications are subject to alteration without prior notice.
- * Site preparation is the customer's responsibility and the base should be firm and level.
- * Ridge and eave heights are only approximate and are not guaranteed measurements.

TOPWOOD GUARANTEE

1 year against faulty parts and workmanship

10 years against rot providing the building is treated on a regular basis from the time of supply



QUALITY SHEDS BUILT TO LAST



BASE PREPARATION

The area should be firm and level by laying either paving slabs over the whole area, or a concrete base. We can supply treated timber bearers as an optional extra to stand your shed on but the area will still need to be firm, level, and clear of any foliage or grass. An extra charge may result if we are unable to erect your building due to the base not being firm or level.

IF IN ANY DOUBT PLEASE ASK.

SITE ACCESS

Please advise us when ordering your building of any access problems there are on your site, i.e. entrance through house/garage, over fences, and any height restrictions (i.e. archways, bars, and over gates). An extra charge may result if we are unable to deliver your building due to not being advised of any access issues.

IF IN ANY DOUBT PLEASE ASK.

TIMBER BUILDING SIZES

All timber sizes quoted are nominal i.e. before machining. All floor sizes are approximately 4" less in width and length than the shed size quoted. Please ask if an exact floor size is needed for base preparation.

You can order with confidence knowing that our skilled workforce produces a first-class range of timber sheds and buildings using carefully selected raw materials. Our purpose fleet of vehicles enables us to make fast and efficient delivery to your door.

TOPWOOD GUARANTEE

1 Year against faulty parts and workmanship.

10 years against rot provided the building is treated on a regular basis from the time of supply.

**Approved Distributor For
Topwood Garden Buildings Ltd**

